

GS Yuasa Dissolved Oxygen Sensor KDS-25B

Features:

- * Long life
- * Virtually no influence from CO₂
- * No external power supply required for sensor operation
- * No warmup time is required

Applications:


- * Water quality control

The GS Yuasa Dissolved Oxygen Sensor KDS-25B is a unique galvanic cell type sensor which was developed for water quality control. Its most notable features are long life expectancy and no influence by CO₂.




Sensitivity Characteristics

The figure below represents typical sensitivity characteristics to dissolved oxygen in 25°C water. The X-axis is indicated as dissolved oxygen concentration in water (mg/L). The Y-axis is indicated as sensor output voltage (mV).

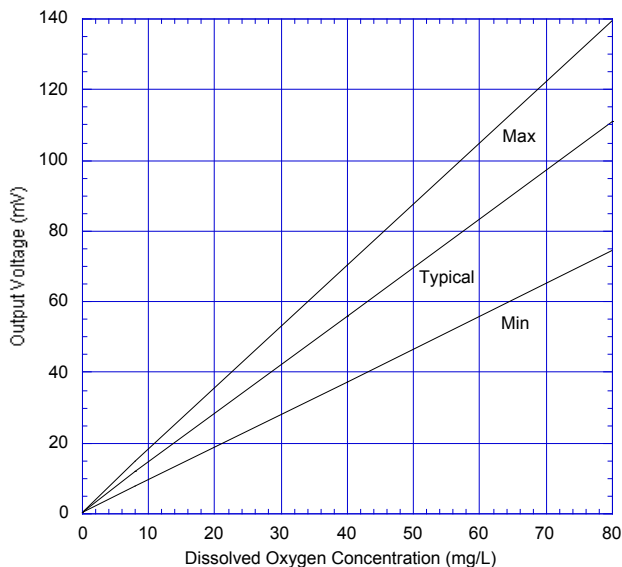


Temperature Dependency (typical)

The figure below represents typical temperature dependency characteristics. The Y-axis is indicated as sensor output voltage (mV).

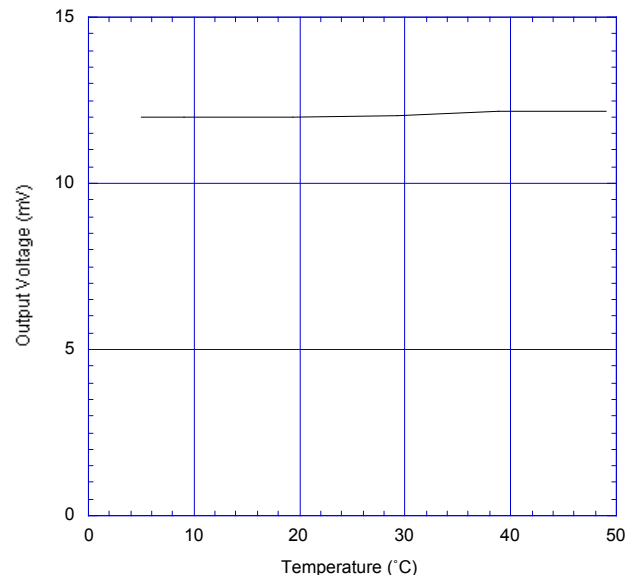

Dimensions

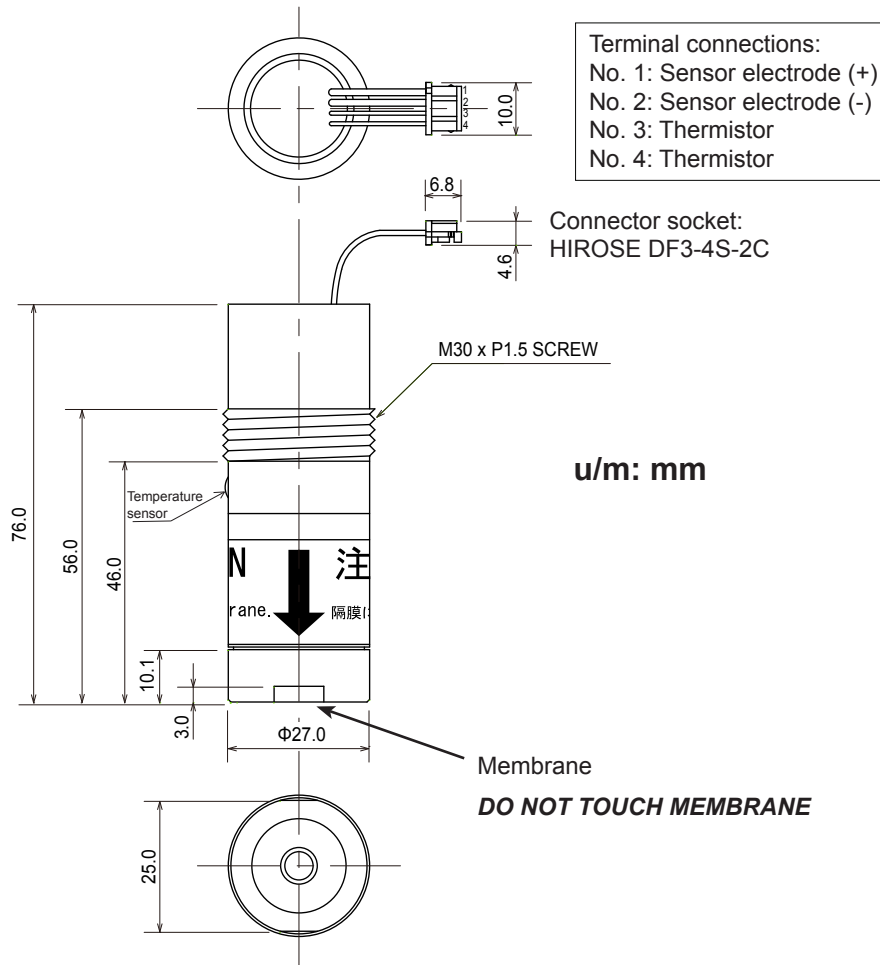

Specifications

Item		Specification
Model number		KDS-25B
Measurement range		0~80mg/L dissolved oxygen
Accuracy		$\pm 5\%$ (full scale in water at $25 \pm 1^\circ\text{C}$)
Operating conditions	Pressure	81~203kPa (corresponds to water depth of 10m)
	Temperature in water	5~35°C
Thermal time constant of temperature sensor (T90)		10 min. or less
Initial output voltage in clean air under standard test conditions		8.0~15.0mV
Standard test conditions	Atmospheric pressure	1013 \pm 5hPa
	Temperature	25 \pm 1°C
	Relative humidity	60 \pm 5%RH

FIGARO ENGINEERING INC.
 1-5-11 Senba-nishi
 Mino, Osaka 562-8505 JAPAN
 Phone: (81)-72-728-2561
 Fax: (81)-72-728-0467
 www.figaro.co.jp
 email: figaro@figaro.co.jp