

# TGS 3870-B00 - for the detection of both Methane and Carbon Monoxide

### Features:

- \* Miniature size and low power consumption
- \* High sensitivity and selectivity to both methane and carbon monoxide (CO)
- \* Low sensitivity to alcohol vapor
- \* Long life and low cost

### Applications:

- \* Combination methane and carbon monoxide detectors

**TGS 3870-B00** is a micro-bead type semiconductor gas sensor for the detection of both methane and carbon monoxide. Using a micro-bead gas sensing structure, both methane and carbon monoxide can be detected with a single sensor element by periodic application of two different heater voltages (high and low). Miniaturization of the gas sensing bead results in a heater power consumption of only 38mW (average).


**TGS 3870-B00** has low sensitivity to alcohol vapors (a typical interference gas in the residential environment) and has high durability, making the sensor ideal for consumer market gas alarms.



The figure below represents typical sensitivity characteristics, all data having been gathered at standard test conditions (see reverse side of this sheet). The Y-axis is indicated as sensor resistance ratio ( $R_s/R_o$ ) which is defined as follows:

$R_s$  = Sensor resistance in displayed gases at various concentrations  
 $R_o$  = Sensor resistance in 3000ppm of methane


### Sensitivity Characteristics (methane):

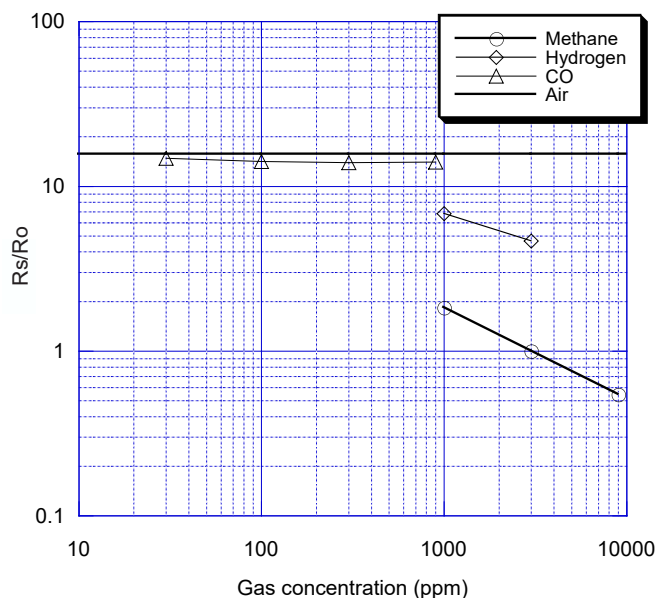

The figure below represents typical sensitivity characteristics, all data having been gathered at standard test conditions (see reverse side of this sheet). The Y-axis is indicated as sensor resistance ratio ( $R_s/R_o$ ) which is defined as follows:

$R_s$  = Sensor resistance in displayed gases at various concentrations  
 $R_o$  = Sensor resistance in 100ppm of CO

### Sensitivity Characteristics (CO):

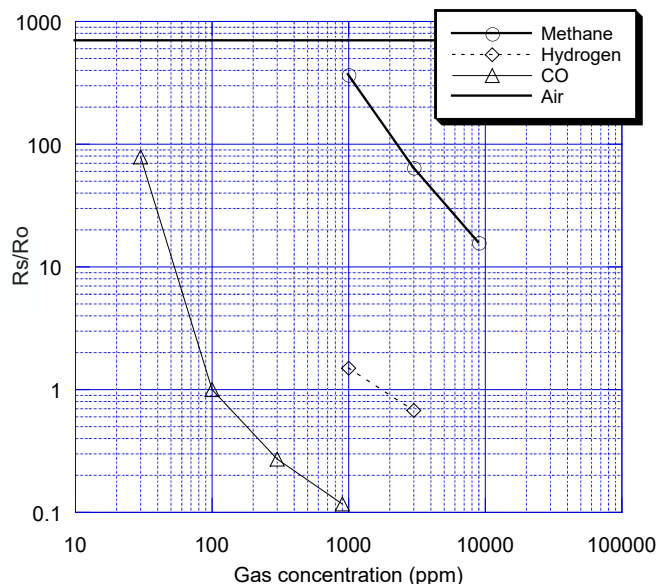

**IMPORTANT NOTE:** OPERATING CONDITIONS IN WHICH FIGARO SENSORS ARE USED WILL VARY WITH EACH CUSTOMER'S SPECIFIC APPLICATIONS. FIGARO STRONGLY RECOMMENDS CONSULTING OUR TECHNICAL STAFF BEFORE DEPLOYING FIGARO SENSORS IN YOUR APPLICATION AND, IN PARTICULAR, WHEN CUSTOMER'S TARGET GASES ARE NOT LISTED HEREIN. FIGARO CANNOT ASSUME ANY RESPONSIBILITY FOR ANY USE OF ITS SENSORS IN A PRODUCT OR APPLICATION FOR WHICH SENSOR HAS NOT BEEN SPECIFICALLY TESTED BY FIGARO.


### Basic Measuring Circuit:

The sensor requires two voltage inputs: heater voltage ( $V_H$ ) and circuit voltage ( $V_C$ ). The sensor has three pins: Pin #3--heater (+), Pin #2--sensor electrode (+), and Pin #1--common (-). To maintain the sensing element at specific temperatures which are optimal for sensing two different gases, heater voltages of 0.9V and 0.2V are alternately applied between pins #1 and #3 during a 20 second heating cycle.

Circuit voltage ( $V_C$ ) is applied between both ends of the sensor ( $R_S$ ) and a load resistor ( $R_L$ ), which are connected in series, to allow measurement of voltage ( $V_{RS}$ ).

Circuit voltage ( $V_C$ ) should be applied only at the moment when the signal is taken from the sensor.

Please refer to the document "Technical Information for TGS3870-B00" for details regarding the timing and application of  $V_C$  and  $V_H$ .

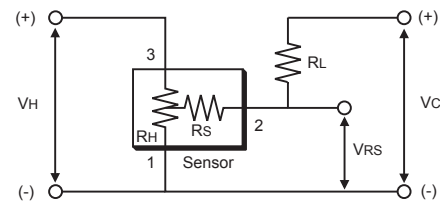

Basic measuring circuit

**Caution:** Do not apply a constant circuit voltage (5.0V) or the sensor would not exhibit its specified characteristics.

### Specifications:

Model number			TGS3870-B00	
Sensing principle			MOS type	
Standard package			Plastic base and metal can	
Target gases			Methane and Carbon Monoxide	
Typical detection range			Methane 1~25% LEL Carbon monoxide 50~1,000ppm	
Standard circuit conditions	Heater voltage	$V_H$	$V_{HH} = 0.9V \pm 3\%$ for 5 sec. $V_{HL} = 0.2V \pm 3\%$ for 15sec.	
	Circuit voltage	$V_C$	5.0±0.2V DC pulse (refer to Technical Information for TGS3870-B00)	
	Load resistance	$R_L$	variable (>0.75kΩ)	
Electrical characteristics under standard test conditions	Heater resistance	$R_H$	3Ω±0.3Ω at room temp.	
	Heater power consumption	$P_H$	120mW	$V_{HH} = 0.9V$ DC
			11mW	$V_{HL} = 0.2V$ DC
			38mW	average
	Sensor resistance	$R_S$	0.35kΩ~3.5kΩ in 3000ppm methane 1.8kΩ~24kΩ in 150ppm CO	
Sensitivity (change ratio of $R_S$ )	$\beta$		0.50~0.65	$\frac{R_S(3000ppm CH_4)}{R_S(1000ppm CH_4)}$
			0.1~0.6	$\frac{R_S(300ppm CO)}{R_S(150ppm CO)}$
Standard test conditions	Test gas conditions	Target gas in air at 20±2°C, 65±5%RH		
	Circuit conditions	$V_{HH} = 0.9V \pm 2\%$ for 5 sec. $V_{HL} = 0.2V \pm 2\%$ for 15 sec. $V_C = 5.0 \pm 0.2V$ DC pulse (refer to Technical Information for TGS3870-B00)		
	Preheating period before test	≥5 days		


The value of power dissipation ( $P_S$ ) can be calculated by utilizing the following formula:

$$P_S = \frac{(V_{RS})^2}{R_S}$$


Sensor resistance ( $R_S$ ) is calculated with a measured value of  $V_{RS}$  by using the following formula:

$$R_S = \frac{(V_{RS} - 0.5V_H)}{(V_C - V_{RS})} \times R_L$$


### Structure and Dimensions:



Top view

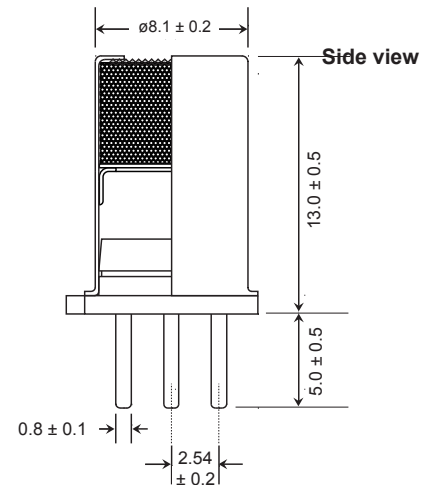

Side view



Bottom view

Pin connection: unit:mm

- 1:Common(-)
- 2:Sensor electrode (+)
- 3:Heater(+)

All sensor characteristics shown in this brochure represent typical characteristics. Actual characteristics vary from sensor to sensor. The only characteristics warranted are those in the Specification table above.

Before purchasing this product, please read the Warranty Statements shown in our webpage by scanning this QR code.



[https://www.figaro.co.jp/en/pdf/Limited\\_Warranty\\_en.pdf](https://www.figaro.co.jp/en/pdf/Limited_Warranty_en.pdf)

**FIGARO ENGINEERING INC.**  
1-5-11 Senba-nishi  
Mino, Osaka 562-8505 JAPAN  
Phone: (81)-727-28-2045  
URL: [www.figaro.co.jp/en/](http://www.figaro.co.jp/en/)